



**ZKT**<sub>ECO</sub>

# Silk Bio -101 TC

## Multi-Bio Time Attendance & Access Control Terminal



SilkBio-101TC is Time & Attendance and Access Control Terminal to be associated with Z-ID fingerprint reader, face recognition and RFID card functions. With the new Z-ID fingerprint reader, the operation remains stable under strong light source and high preciseness of verification of wet and rough fingers. With latest facial algorithm and the innovation features, SilkBio-101TC is bringing you the whole new experience.


## Features

- Multi-biometric fast verification
- Touch Keypad
- Infrared auto-turning on function to save power
- Quick recognition of dry, wet and rough fingers
- Multi-language supported
- Built-in 2000mAh backup battery to extend operation time
- Prevents duplicated face registration and supports fake face detection function


# Specifications

|                              |                                                                                                                                                                      |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Face Capacity                | 2,000                                                                                                                                                                |
| Fingerprint Capacity         | 3,000                                                                                                                                                                |
| Card Capacity                | 3,000 (Optional)                                                                                                                                                     |
| Algorithm                    | ZKfinger V10.0 / ZKFace V5.8                                                                                                                                         |
| Record Capacity              | 100,000                                                                                                                                                              |
| Display                      | 2.8-inch TFT Screen                                                                                                                                                  |
| Communication                | TCP/IP, USB-Host, Wi-Fi (Optional)                                                                                                                                   |
| Standard Functions           | Work Code, SMS, DST, Scheduled-bell, Self-Service Query, Automatic Status Switch, Photo ID T9 Input, Camera, 9 digit user ID, Built-in Battery, Multiple Verify Mode |
| Access Control Interface for | Lock, Door Sensor, Exit Button, Alarm                                                                                                                                |
| Optional Functions           | ID / IC, ADMS, External Printer and Bell                                                                                                                             |
| Power Supply                 | DC 12V 1.5A                                                                                                                                                          |
| Operating Temp.              | 0 °C- 45 °C                                                                                                                                                          |
| Operating Humidity           | 20%-80%                                                                                                                                                              |
| Dimension                    | 180 x 154 x 34.2 mm                                                                                                                                                  |

## Configuration

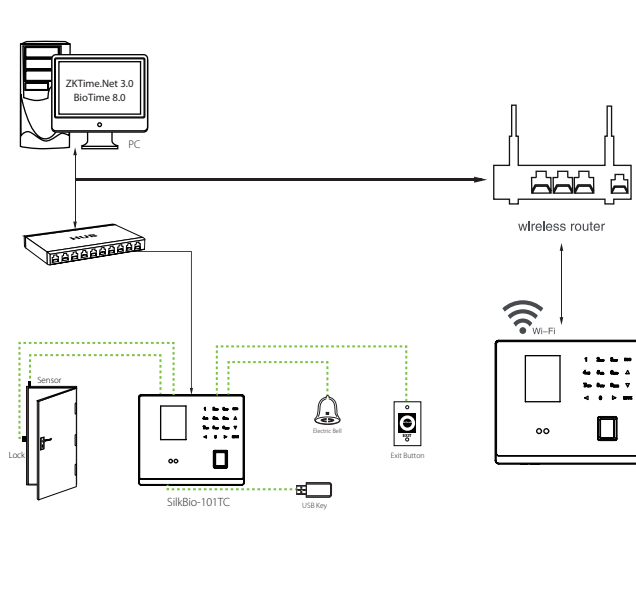

## Dimensions

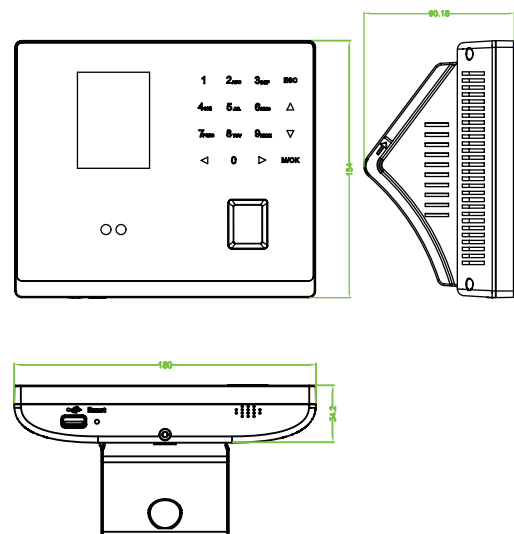

**Security Electronic Access**

Soluciones en control de acceso



978610434



ventas@segaccess.com